





Performance specifications

Hot Side Temperature, C	150	-5
Cold Side Temperature, C	50	± 5
Thermal conductivity, W/K	0.7	0.1
Heat Flux, W	72	10
Power, W	1.7	Min.
Load Voltage, V	2.3	± 0.2
Internal Resistance, Ohm	3.2	± 0.1
Current, A	0.72	± 0.1
Opened Circuit Voltage, V	4.6	± 0.5

Drawing

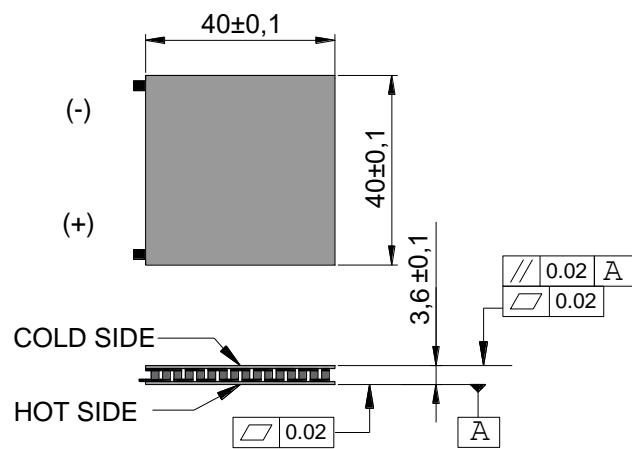

Conversion Rate of the modules Vs Th under various Tc

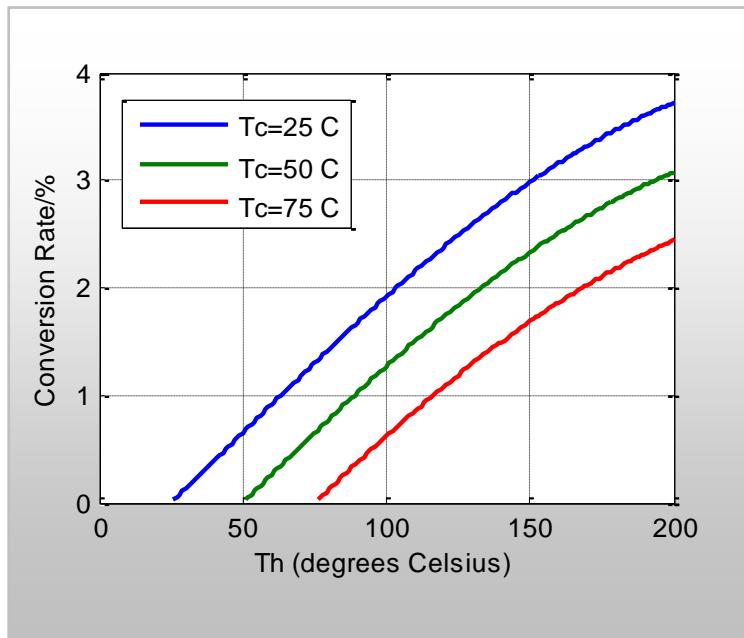

Performance Curves of the Module PGL-1-1

