



# Power Generating Modules


## PGM-56-200

ENGINEERING & PRODUCTION




Performance specifications		
Hot Side Temperature, C	200	-5
Cold Side Temperature, C	50	±5
Thermal conductivity, W/K	5.26	0.1
Heat Flux, W	790	10
Power, W	23.0	Min.
Load Voltage, V	7.25	±0.2
Internal Resistance, Ohm	2.3	±0.1
Current, A	3.2	±0.1
Opened Circuit Voltage, V	14.5	±0.5







Drawing

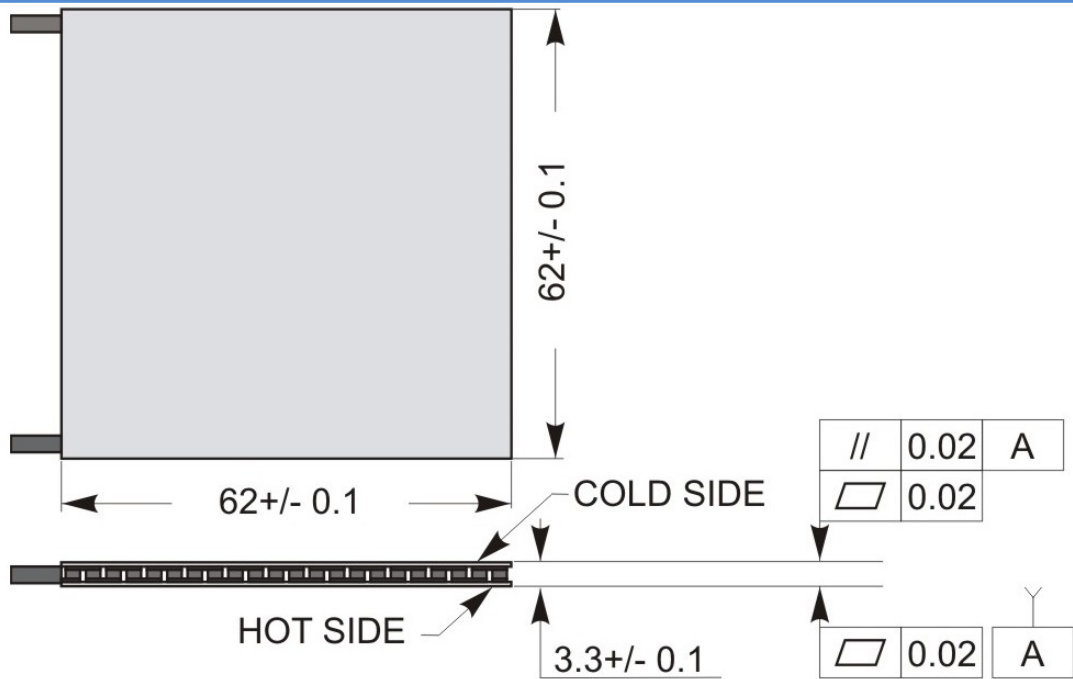

Conversion Rate of the modules Vs Th under various Tc

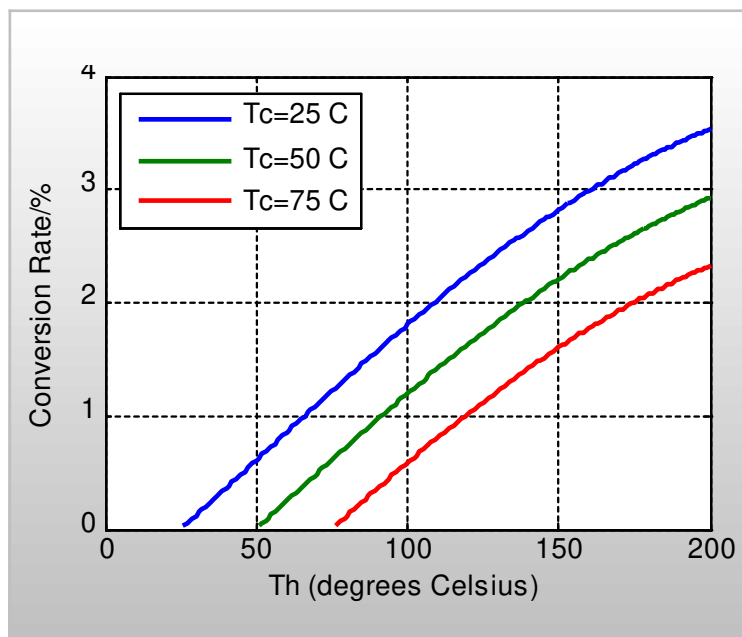

# Performance Curves of the Module PGM-56-130

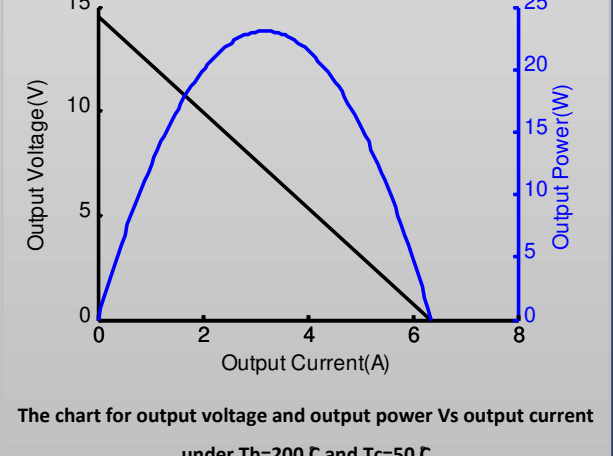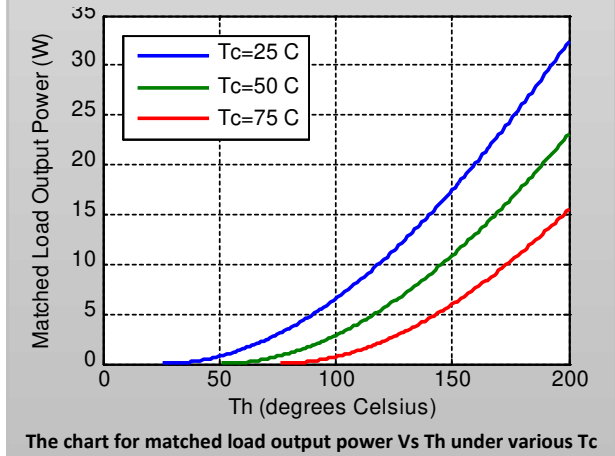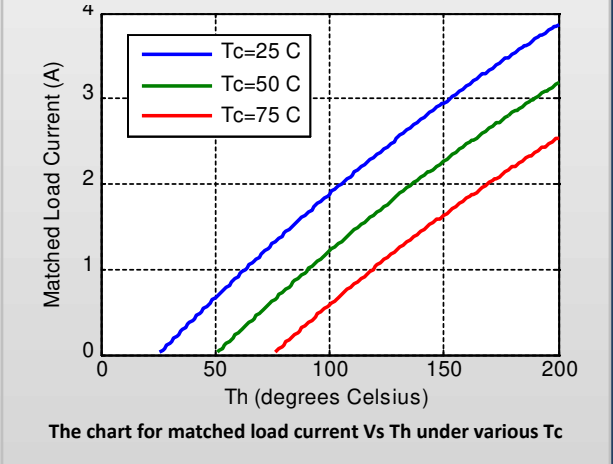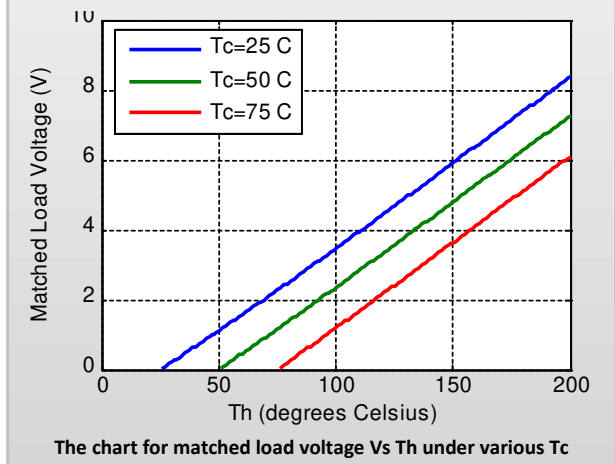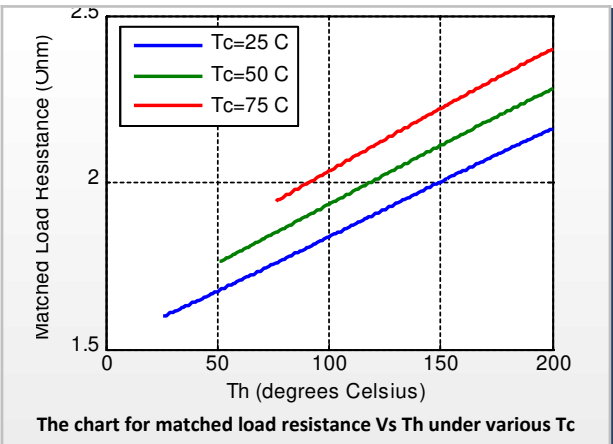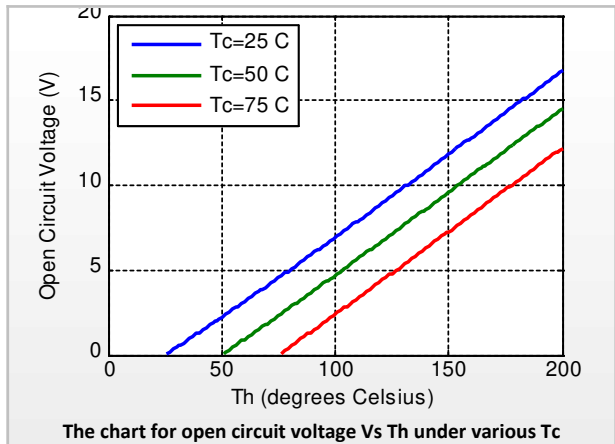

Orders: [main@interm-info.com](mailto:main@interm-info.com)

Phone: +380 372 542650/+380 50 3381021